STARLIKE ColorCrystal EVO

Made In Italy

Application

1		Empty completely all the contents of the catalyst (B) onto the paste (A).
2		Mix at slow speed using an electric drill equipped with mixing paddle. Scrape the walls of the bucket to eliminate all parts of non-catalysed product.
3		The joints must be dry. Introduce the mortar into the joints using the suitable green rubber float (art. 946GR) spreading diagonally across the joints. Remove the excess product.
4		The grout must be cleaned while the product is still wet. Sprinkle clean water. Initial cleaning using a moistened white felt (art. 109/GBN making circular movements. Ensure no water enters the joints. Any adjustments to the grout must be performed before cleaning with w
5		Now perform a second cleaning with a rigid cellulose sponge (art. 128G0001).
6		Any stains of the transparent product can be removed after 24 hours or anyway after the gap has hardened. Use HAZE REMOVER. Spread HAZE REMOVER with the white felt.
7		Leave on for 15-30 minutes. Scrub the surface with the white felt.
8		Rinse with clean water. Dry immediately with a clean cloth and do not wait for the evaporation of the rinse water.

Mixture life: About 1 hour at T= +23°C / 73,4°F
Application temperature: from +12°C to +30°C / From + 64,4°F to 73,4°F
Recommended application temperature: from +18°C to +23°C / From 64,4°F to 73,4
Walkable after:24 hours at T= +23°C / 73,4°F
Ready for use:5 days at T= +23°C / 73,4°F
Storage time: 24 months in original packaging, avoid freezing temperatures.
Packaging: 1, 2.5 and 5 kg buckets
Mixing ratios: Component A: 93.7 parts by weight - Component B: 6.3 parts by weight -
The two components are pre-measured in their respective packaging
Consistency of the mix: creamy grout
Specific gravity of mix: 1.55 kg/l
Joint width: Up to 3 mm

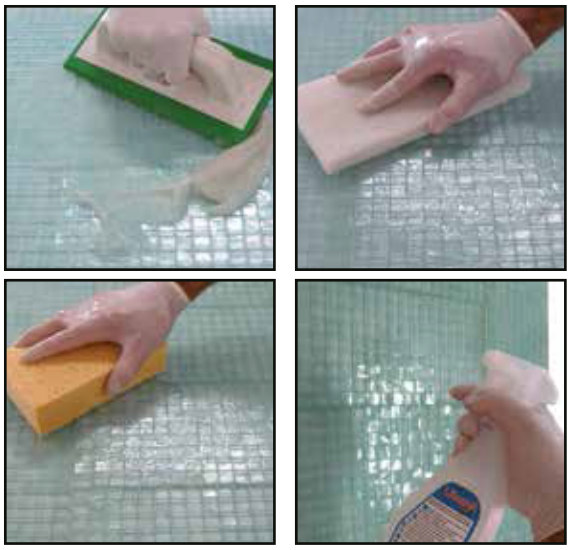

ADVISED TOOLS

Art. 946GR

Art. 109/ G

Art. 128/ G



HAZE REMOVER

LITOKOL®

the Tile Doctor

EXCLUSIVE DISTRIBUTOR FOR USA
Tile Doctor
www.TileDoctor.com
877-TileDoc (845-3362)