STARLIKE EVO

Made In Italy

Application

1		Empty completely all the contents of the catalyst (B) onto the paste (A).
2		Special finishes: pour the additive onto the paste and mix slowly.
3		Mix at slow speed using an electric drill equipped with mixing paddle. Scrape the walls of the bucket to eliminate all parts of non-catalysed product.
4		The joints must be dry. Introduce the mortar into the joints using the suitable green rubber float (Art. 946GR) spreading diagonally across the joints. Remove the excess product.
5		The grout must be cleaned while the product is still wet. Sprinkle clean water. Initial cleaning using a moistened white felt (art. 109/GBNC) making circular movements. Ensure no water enters the joints.
6		Now perform a second cleaning with a rigid cellulose sponge (art. 128G0001).
7		Any stains of the transparent product can be removed after 24 hours or anyway after the gap has hardened. Use Haze Remover. Spread Haze Remover with the white felt.
8		Leave on for 15-30 minutes. Scrub the surface with the white felt.
9		Rinse with clean water. Dry immediately with a clean cloth and do not wait for the evaporation of the rinse water.

Application data

Time before grouting floor application:

with fast-setting adhesive: 4 hours
with mortar: 7-10 days
Wall application
- with normal-setting adhesive: 24 hours
- with fast-setting adhesive: 4 hours
- with mortar: 2-3 days

Mixing ratios:
Component A: 93.7 parts by weight
Component B: 6.3 parts by weight
The two components are pre-measured in their respective packaging
Mix consistency:
Thixotropic paste
Specific gravity of mix
1.55 kg/l

Mixture life:
About 1 hour at T = +23°C / 73,4°F
Application temperatures allowed:
From +10°C to +30°C / From +50°F to 86°F
Recommended application temperature:
From +18°C to +23°C / From + 64,4°F to 73,4°F
Set to light foot traffic:
24 hours at T = +23°C / 73,4°F
Ready for use:
5 days at T = +23°C / 73,4°F
Joint width:
From 1 to 15 mm (0,039 - 0,59 in)

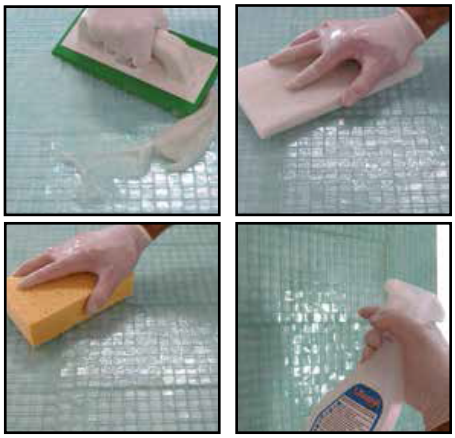

Art. 946GR

Art. 109/ G

Art. 128/ G

HAZE REMOVER

LITOKOL®

the Tile Doctor®

EXCLUSIVE DISTRIBUTOR FOR USA
Tile Doctor
www.TileDoctor.com
877-TileDoc (845-3362)